



COOLTOUCH RX-802SDI

SDI Rack Mounted Dual 8" Multimedia Monitor with Integrated Audio
with tally and 10 bit encoded composite output from SDI

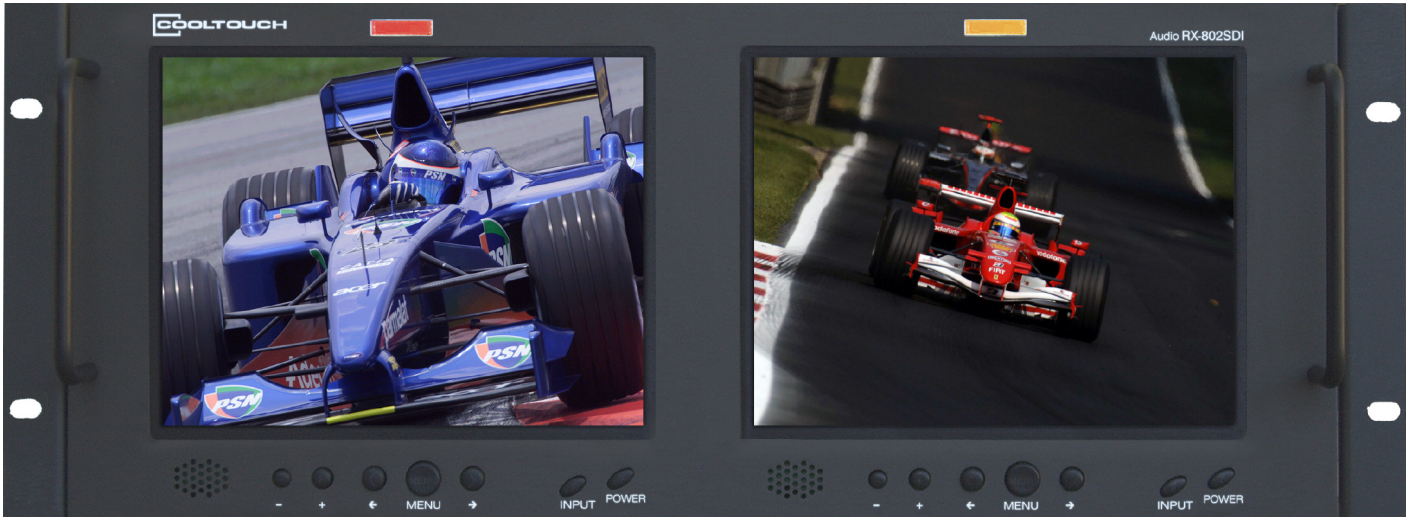

- Two 8" LCD Video Monitors
- 1920 x 480 Pixels, 400 cd/m², 400:1 Contrast
- One SDI Input - per screen
- One Composite Video Input - per screen
- One VGA Input - per screen
- One S-Video Input - per screen
- One Analog Audio Input - per screen
- 10 Bit Encoded Composite output from SDI
- Loop-Through Output of Composite Video
- Tri-Color LED Contact Closure Tally
- 525 / 625 & NTSC / PAL autosensing
- Integrated Audio Confidence Monitor
- 3 Rack Units Tall, 2.2" / 56mm Deep Chassis

The RX-802SDI dual 8" rack mount monitor includes one audio, one SDI, one composite video (with loop-through), one S-Video, and one VGA input - per screen and offers excellent picture quality even under high ambient light conditions. The built-in VGA scalar can accommodate resolutions from 640x480 to 1024x768. Each screen has discreet audio with built-in speakers that can be used as a confidence monitor or audible alarm from an external source. The unit is powered by only 12VDC and comes with an 110/240VAC adapter.

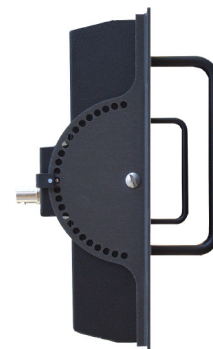

INTEGRATED AUDIO

BACK LIGHT LIFE 50,000 HOURS

1920 x 480 Pixels

LCD Diagonal	LCD Size	No. of LCDs	Resolution*	Aspect Ratio	Dot pitch	Viewing Angles	Backlight	Rack Size	Dimensions: US	Dimensions: Metric	Weight*
8" / 203mm	163 x 122mm	2	1920 x 480	4 : 3	0.084 x 0.254mm	120 / 130 degrees	50k hours	4	19 x 6.9 x 2.2"	483 x 175 x 56mm	5 lbs (2.3kg)

MODEL	INPUTS					OUTPUTS			Brightness	Contrast	Touch Screen	Weather Proof	Audio	Power
	Composite	VGA	S-Video	SDI	Analog Audio	Composite	SDI	Analog Audio						
RX-802SDI	2	2	2	2	2	4 (2 from SDI, 2 passive loop)	2 reclocked	-	400	400 : 1	-	-	Yes	4A at 12VDC

CoolTouch Monitors LLC

P.O. Box 10771 - Marina del Rey, CA 90295 - Tel: (310) 923-1354 - Fax: (310) 392-3510
 info@cooltouchmonitors.com - www.CoolTouchMonitors.com