


COOLTOUCH XP-2401HD

Stand Alone 24" LCD MultiFormat HD Monitor with De-embedded Audio

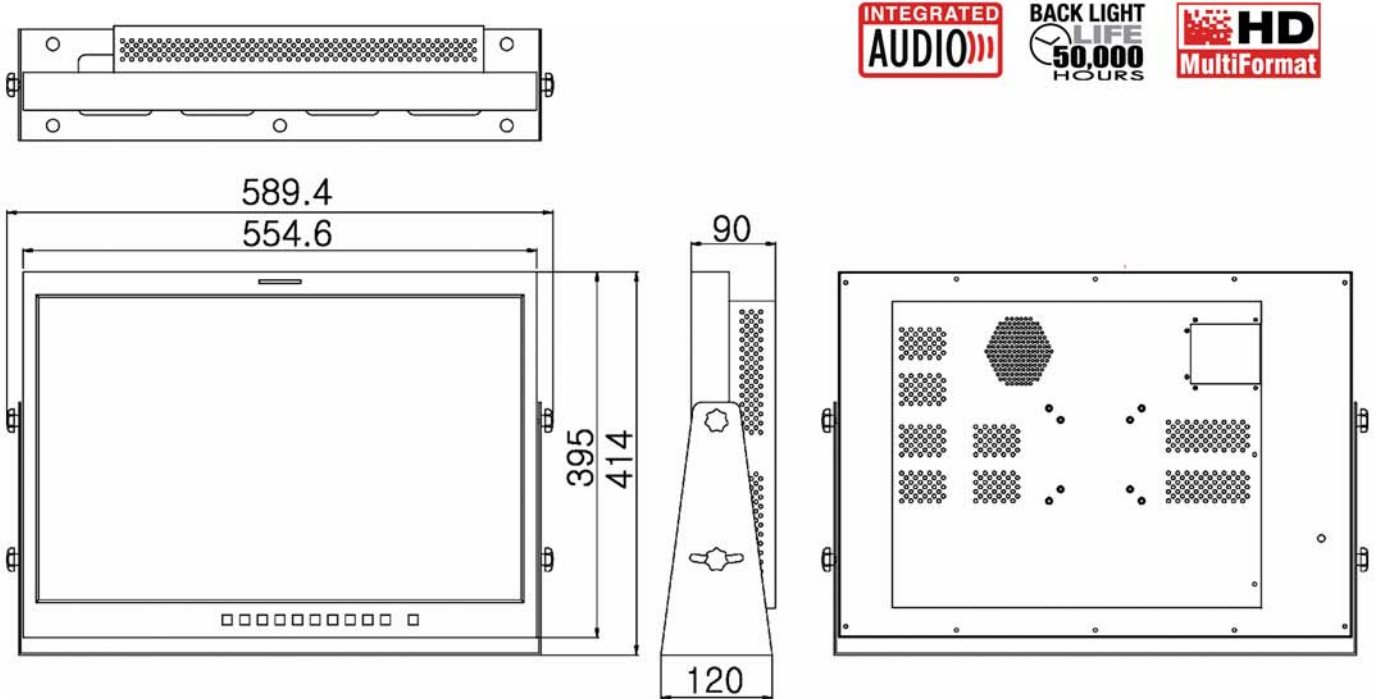

- Single 24.0" Widescreen LCD Video Monitor
- 1920 x 1200 Pixels
- 450 cd/m², 700:1 Contrast, Ultra Fast Response
- Dual MultiFormat HD In, DVI-I and Component In
- NTSC / PAL autosensing
- De-embedded Digital Audio capability
- On-Screen Audio Level Metering
- Integrated Audio Speakers Confidence Monitor
- Bi-Color LED Contact Closure Tally
- Measures 21.8"x15.6"x3.5" 554x396x90mm

Offering superb quality, yet at a highly cost effective price, the XP-2401HD 16:9 24" stand alone monitor includes two SD/HD-SDI with one reclocked output, 1 DVI/VGA (DVI+Gender 15pin), 3 composite video (shared BNC's for s-video/component RGB/YPbPr) input and 1 stereo pair of analog audio and offers excellent picture quality even under high ambient light conditions with 450nits of brightness and a 700:1 contrast ratio. The de-embedded audio input feeds the built-in speakers that can be used as a confidence monitor. Designed for broadcasters and other professionals who need to monitor both Digital Video and Audio and want to save on purchasing separate units. The unit also offers on-screen audio level meters, timecode display and video waveform monitor. An analog output of the digital audio input is also available via the RCA connectors on the rear of the unit.

LCD Diagonal	LCD Size	No. of LCDs	Resolution*	Aspect Ratio	Dot pitch	Viewing Angles	Backlight	Rack Size	Dimensions: US	Dimensions: Metric	Weight*
24" / 609 mm	518 x 324mm	1	1920x1200	16:9	0.270 x .0.270mm	178 / 178 degrees	50k hours	N/A	21.8 x 15.6 x 3.5"	554 x 396 x 90mm	31lbs (14.2kg)

MODEL	INPUTS					OUTPUTS			Brightness	Contrast	Touch Screen	Weather Proof	Audio	Power
	Composite	VGA	DVI-I	HD/SD SDI	Digital Audio	Composite	SDI	Analog Audio						
XP-2401HD	3	1	1	2	De-embed 2 / 16 ch	3 (active loop)	Select 1 from In	Convert from De-embed In	450	700 : 1	-	-	Yes	100-230 VAC, 60W

CoolTouch Monitors LLC

P.O. Box 10771 - Marina del Rey, CA 90295 - Tel: (310) 923-1354 - Fax: (310) 392-3510
 info@cooltouchmonitors.com - www.CoolTouchMonitors.com