

# COOLTOUCH XP-801TA


## Standalone 8" Touchscreen LCD Multimedia Monitor with Integrated Audio



- 8" 4:3 LCD Video Monitor
- Integrated Audio Confidence Monitor
- 1920 x 480 Pixels
- 330 cd/m<sup>2</sup>, 400:1 Contrast Ratio
- Two Composite Video Inputs
- One RGB Analog Video Input
- One S-Video Input
- NTSC / PAL autosensing
- One Analog Audio Input
- USB Based Touchscreen System
- Top & Bottom 1/4 - 20 Connections
- 1/4 - 20 stand included
- VESA 75mm Mounting Holes on Rear



The XP-801TA is an 8" stand alone LCD monitor that has TouchScreen, Audio with integrated speaker, Dual Composite Video, and an VGA/analog RGB (RGBHV) input with a built-in scalar up to 1024x768. A non TouchScreen version is available also, XP-801A. The high-brightness LCD offers excellent picture quality even under high ambient light conditions. The unit has built-in 1/4-20 mounts on the top and bottom of its rugged stylish metal enclosure. Its connectors are positioned to eliminate any damage while in use. Powered by only 12VDC (power supply included), and designed to give reliable performance in the field.

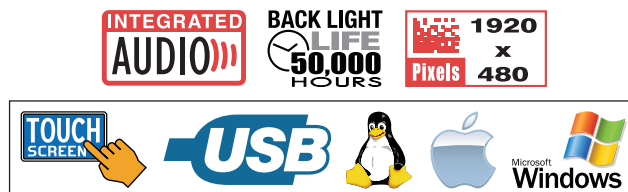

LCD Diagonal	LCD Size	No. of LCDs	Resolution*	Aspect Ratio	Dot pitch	Viewing Angles	Backlight	Rack Size	Dimensions: US	Dimensions: Metric	Weight*
8" / 203mm	163 x 122mm	1	1920 x 480	4 : 3	0.084 x 0.254mm	120 / 130 degrees	50k hours	-	8.5 x 6.8 x 2.4"	216 x 173 x 61mm	3 lbs (1.4kg)

MODEL	INPUTS					OUTPUTS			Brightness	Contrast	Touch Screen	Weather Proof	Audio	Power
	Composite	VGA	S-Video	SDI	Analog Audio	Composite	SDI	Analog Audio						
XP-801TA	2	1	1	-	1	-	-	-	330	400 : 1	Yes	-	Yes	1.2A at 12VDC

### CoolTouch Monitors LLC

P.O. Box 10771 - Marina del Rey, CA 90295 - Tel: (310) 923-1354 - Fax: (310) 392-3510  
 info@cooltouchmonitors.com - www.CoolTouchMonitors.com